



L.C. Park & Rec roof section


Drawn and respectfully submitted by: Steve Lundeen

Lundeen Metal Specialists

1-29-15

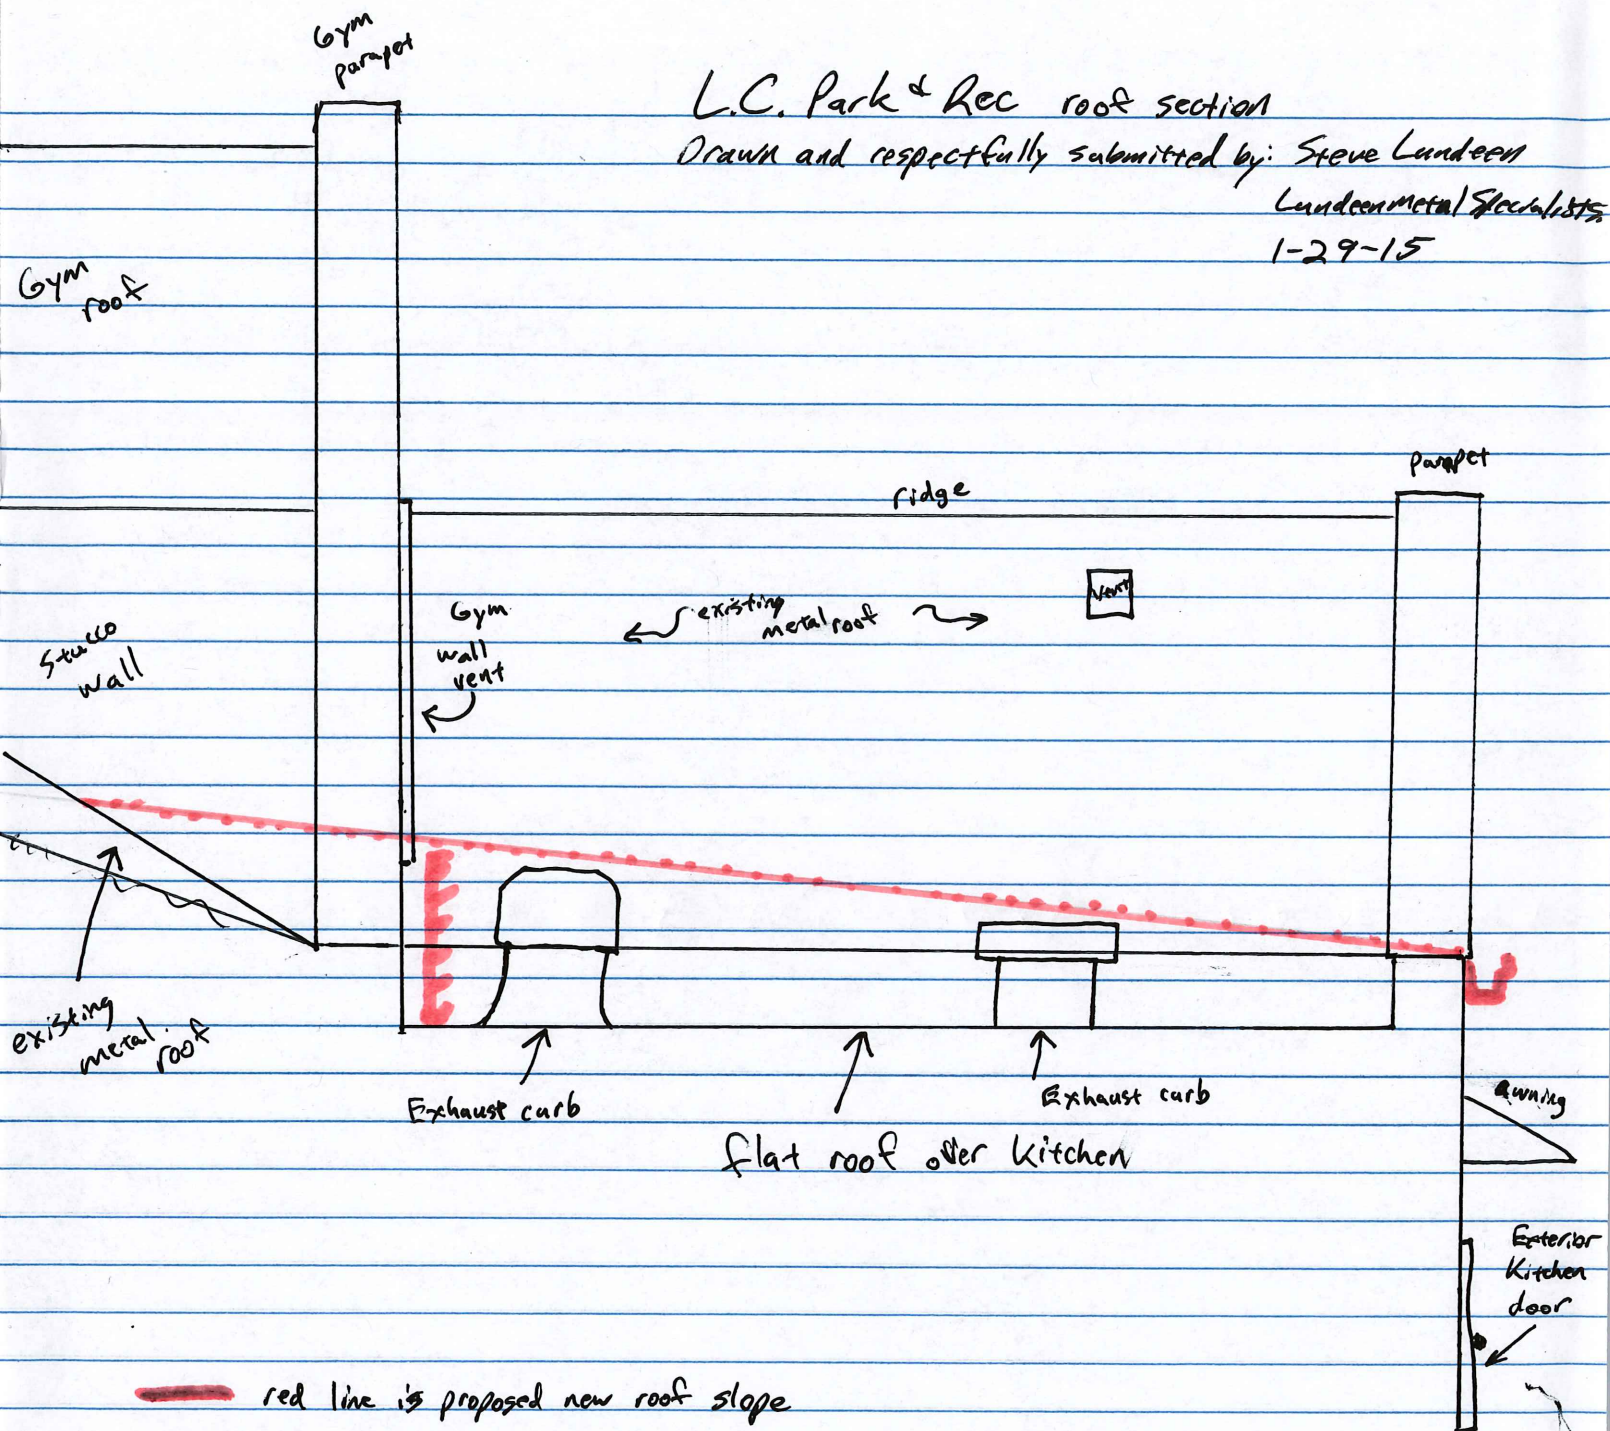

 - proposed new 6" gutter

 - proposed support wall for new roof trusses.

- Kitchen exhaust curbs will be extended to accommodate new roof slope.

Estimate

Lundeen Metal Specialists Inc.
 481 Stansel Rd.
 Cleveland GA 30528
 706-219-4778(office)
 706-892-8166(cell)

Date	Estimate No.	Project
01/23/15	902	

Name/Address
Lumpkin Co. Park and Rec. Building Dahlonega GA

Item	Description	Quantity	Cost	Total
roof	Labor and materials to frame a new roof system over the existing flat roof. This price is for an engineered metal truss to span the flat roof on 16" spacing. The solid 1/2" decking will be covered with an Ice & Water Shield underlayment. The existing kitchen exhaust vents will have new curbs built and flashed. This estimate does NOT provide for any possible electrical or plumbing work.	1	4,300.00	4,300.00
roof	Labor and materials to install a new 26ga R Panel roof to transition with the existing metal roofing. This price includes all related flashings, curbs and transitions. The new end wall flashing will cover a section of the gymnasium exhaust vent by 12"-16".	1	3,400.00	3,400.00
gutters	Labor and materials to install gutter along roof area. Gutter price is for a 6" typical aluminum gutter with two 3"x4" downspouts.	55	5.00	275.00
LMS Inc. is fully covered by workers' compensation and general liability insurance.			Total	\$7,975.00